

Specification

Product Part Number

- T2404L6A-XX

Product Description

- U/UTP, 23AWG solid bare copper, CAT.6A, CMR
- With cross filler
- With rip cord

Product Features

- High performance of single cable transmission.
- Zigzag jacket design provides excellent performance of six around one bundle transmission.
- Round and smooth jacket without twisted stripe.
- High quality of safety property.
- Sweep frequency up to 650 MHz.


Application

- Structure cabling for horizontal and building backbone cable.
- Transmission of digital and analogue for data, video and audio applications.
- IEEE 802.3an 10GBASE-T and legacy speeds.
- CDDI / ATM / Token Ring
- IEEE 802.3af (PoE) / IEEE 802.3at (PoE+)

Applicable Standard

- Electrical Transmission
 - ANSI/TIA-568-C.2 (2009)
 - ISO/IEC 11801 (Edition 2.2)
 - IEC 61156-5 (Edition 2.0)
- Flame Test
 - UL 1666 (CMR)
- Material and Construction
 - UL 444
 - CSA 22.2 NO.214
- EU Directive 2011/65/EC (RoHS2)
- EU Directive 2006/95/EC (LVD)
- CE compliance date: 2010.01.01

Sectional Drawing

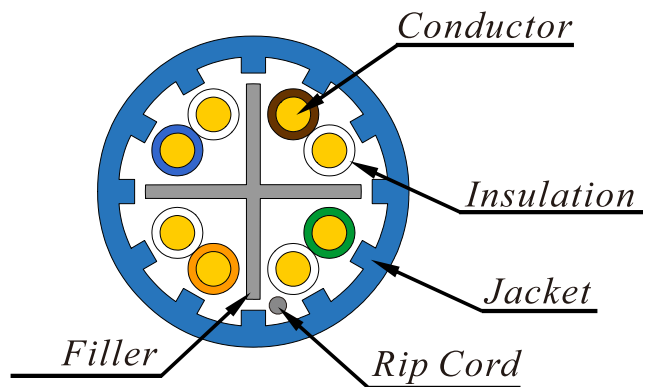

Material and Construction

Establish Date	2014.03.01	Edition	1.1	Revised Date	2014.10.13
----------------	------------	---------	-----	--------------	------------

Headquarters : 200 Hillsboro St.
Oxford, NC 27565 USA
Phone Number: 800-726-1411
Web Site: www.weltronproducts.com

Conductor	Material	23AWG solid bare copper	
Insulation	Material	Polyolefin (PO)	
	Color code & diameter	Blue & white	1.19 ± 0.02 mm
		Orange & white	1.10 ± 0.02 mm
		Green & white	1.17 ± 0.02 mm
		Brown & white	1.08 ± 0.02 mm
Twisted	Description	Left hand direction	
Filler	Material	Polyolefin (PO)	
Assembly	Description	Left hand direction	
Rip cord	Material	Polyester multi-yarn	
Jacket	Material	Flame retardant polyvinyl chloride (FRPVC)	
	Diameter	8.4 ± 0.2 mm	
	Thickness	1.30 ± 0.10 mm	
	Color	Per customer`s request	
Marking	WELTRON 10GS CAT 6A --- E465248- 001 UTP 4PR 23AWG (UL) CMR --- ETL VERIFIED TO TIA - 568- C.2 CAT 6A mmyyRoHS COMPLIANT XXXXFT Note 1: mmyy is date code.		

Usage & Environmental Condition

Temperature range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	-20°C to 60°C
Minimum bending radius		≥ 4 times of overall diameter
Maximum pulling tension		≤ 110 N

Physical & Electrical Characteristics (at 20°C)

Temperature & voltage rating	75°C
------------------------------	------

Spark test	2.5 KV DC
AC leakage current through overall jacket	$\leq 10\text{mA}$ (1.5KV AC)
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	$\leq 9.38 \ \Omega/100\text{m}$
Resistance unbalance	$\leq 5\%$
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	$\geq 5000 \text{ M}\Omega \cdot \text{m}$
Mutual capacitance	$\leq 5.6 \text{ nF}/100\text{m}$
Capacitance unbalance pair-to-ground	$\leq 330 \text{ pF}/100\text{m}$

Transmission Performance (at 20°C)

Frequency	IL	NEXT	PS. NEXT	ACR	PS. ACR	ACRF	PS. ACRF	RL	Propagation Delay	Delay Skew	PS. ANEXT	PS. AACRF
(MHz)	Max. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Max. ns/100m	Max. ns/100m	Min. dB/100m	Min. dB/100m
1	2.08	78.30	76.30	76.22	74.22	71.80	68.80	20.00	570.00	45.00	67.00	67.00
4	3.80	69.27	67.27	65.47	63.47	59.76	56.76	23.01	552.00		67.00	66.16
8	5.31	64.75	62.75	59.44	57.44	53.74	50.74	24.52	546.73		67.00	60.14
10	5.93	63.30	61.30	57.37	55.37	51.80	48.80	25.00	545.38		67.00	58.20
16	7.49	60.24	58.24	52.75	50.75	47.72	44.72	25.00	543.00		67.00	54.12
20	8.38	58.78	56.78	50.41	48.41	45.78	42.78	25.00	542.05		67.00	52.18
25	9.38	57.33	55.33	47.95	45.95	43.84	40.84	24.32	541.20		67.00	50.24
31.25	10.50	55.88	53.88	45.37	43.37	41.90	38.90	23.64	540.44		67.00	48.30
62.5	14.99	51.36	49.36	36.37	34.37	35.88	32.88	21.54	538.55		65.56	42.28
100	19.14	48.30	46.30	29.17	27.17	31.80	28.80	20.11	537.60		62.50	38.20
150	23.68	45.66	43.66	21.98	19.98	28.28	25.28	18.87	536.94		59.86	34.68
200	27.58	43.78	41.78	16.21	14.21	25.78	22.78	18.00	536.55		57.98	32.18
250	31.07	42.33	40.33	11.26	9.26	23.84	20.84	17.32	536.28		56.53	30.24
300	34.27	41.14	39.14	6.88	4.88	22.26	19.26	16.77	536.08		55.34	28.66
350	37.25	40.14	38.14	2.89	0.89	20.92	17.92	16.30	535.92		54.34	27.32
400	40.05	39.27	37.27	N.A.	N.A.	19.76	16.76	15.89	535.80		53.47	26.16
450	42.71	38.50	36.50	N.A.	N.A.	18.74	15.74	15.53	535.70		52.70	25.14
500	45.26	37.82	35.82	N.A.	N.A.	17.82	14.82	15.21	535.61		52.02	24.22
550	47.70	37.19	35.19	N.A.	N.A.	16.99	13.99	14.92	535.54		51.39	23.39
600	50.05	36.63	34.63	N.A.	N.A.	16.24	13.24	14.66	535.47		50.83	22.64
650	52.33	36.11	34.11	N.A.	N.A.	15.54	12.54	14.42	535.41		50.31	21.94

Values above 500MHz are for information only.

Shipping Information

Item	Dimension	Nominal net weight
Cable	305 m	19.39 kg (42.74 lb)



Plywood reel	D400 x d220 x H330 x h300 mm	3.2 kg
Pallet	1150 x1150 x120 mm	14.1 kg

Container type	Capacity of pallet	Capacity of plywood reel
20 feet	20	480
40 feet	40	960

Shipping could use standard delivery form or per customer`s request.


Schematic Drawing of Reel & Package

Fumigated plywood reel.

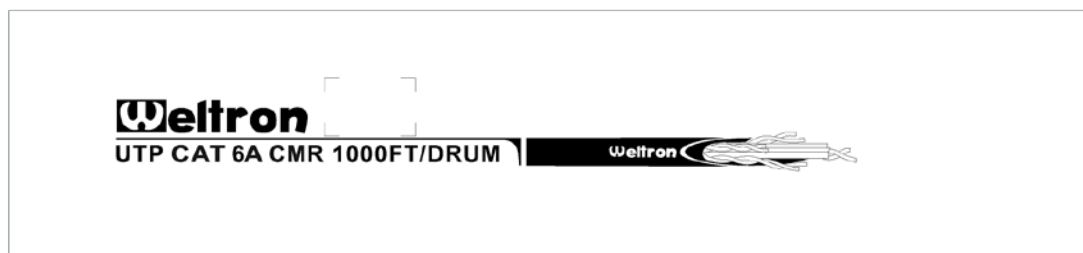


Schematic Drawing of Package

Each package of pallet delivered with plastic wrap and packing strap.

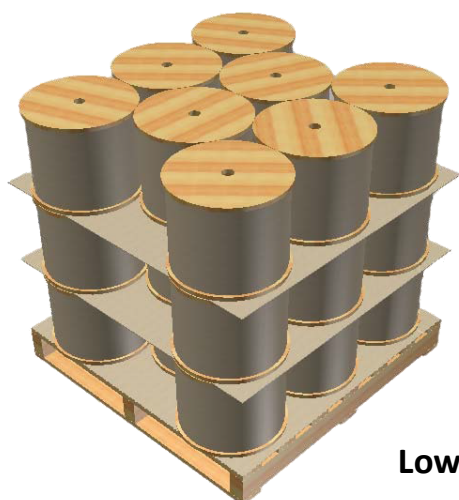

Lower Pallet

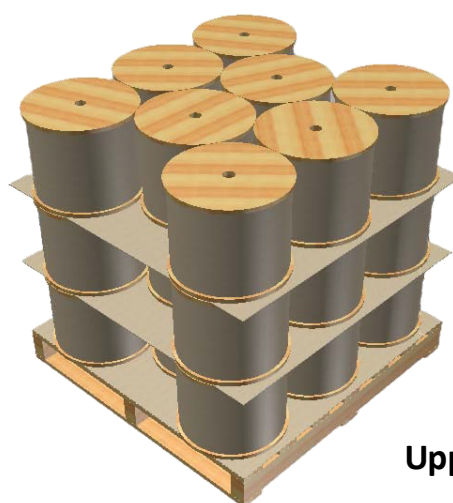

Upper Pallet

Revised Information

Edition	Revised Description	Revised Date
1.1	Revised transmission performance table. Enhanced the criteria limit.	2014.10.13