


ROHS Compliant

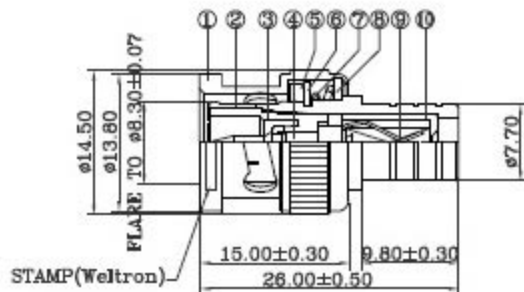


CRIMPED FERRULE HEX CRIMP SIZE .319"

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)


- 1.BRASS PER QQ-B-626
- 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.JIS H 3250,C 2700

13	FERRULE	NOTE 4	1	NOTE 2
12	FERRULE	NOTE 4	1	NOTE 2
11	FERRULE	NOTE 4	1	NOTE 2
10	INSULATOR	POM	1	NATURAL
9	SPRING CONTACT	P-BRONZE	1	NOTE 3
8	WASHER	IRON	1	NOTE 2
7	SPRING	65Mn	1	NATURAL
6	RETAINER RING	65Mn	1	NOTE 2
5	GASKET	RUBBER	1	RED
4	CONTACT PIN	NOTE 1	1	NOTE 3
3	INSULATOR	POM	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED


REVISIONS				
RevNo	Description	Date	Revision	Mender
1				
2				

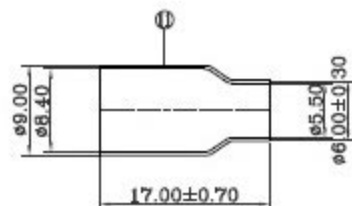

(RG58U, RG59U-PLENUM)

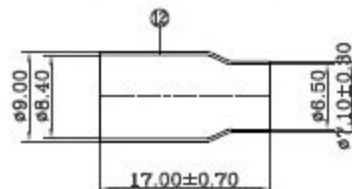

(RG59U)

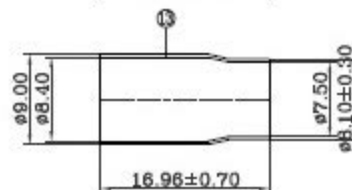

(RG6U)



RECOMMENDED
CABLE STRIPPING DIM'S

Weltron®				TITLE			
PART NO. 44-285-3				BNC MALE QUICK CRIMP TYPE(50 OHM) (FOR RG58U, RG59U, RG59U-PLENUM, RG6U)			
				UNLESS OTHERWISE SPECIFIED TOLERANCES:			
MODEL NO.				0.5-15 = ±0.15	ANGLES	DESIGNED	<i>Xwj</i>
DRAWING NO.				15-30 = ±0.30	±9°	DRAWING	<i>Ckg</i>
CAD FILE				30-120 = ±0.60		CHECKED	<i>David</i>
Yin sheng/Yifaxing/SB/SB114				>120 = ±1.00		APPROVED	<i>Andy</i>
EDITION A1				PUBLISH DATE		APPROVED	
				2009/11/24		3RD ANGLE	