
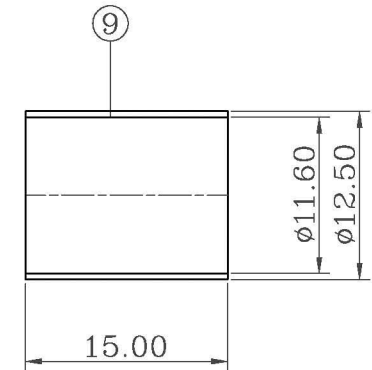



ROHS Compliant

REVISIONS


RevNo	Description	Date	Revision	Mender
1				
2				

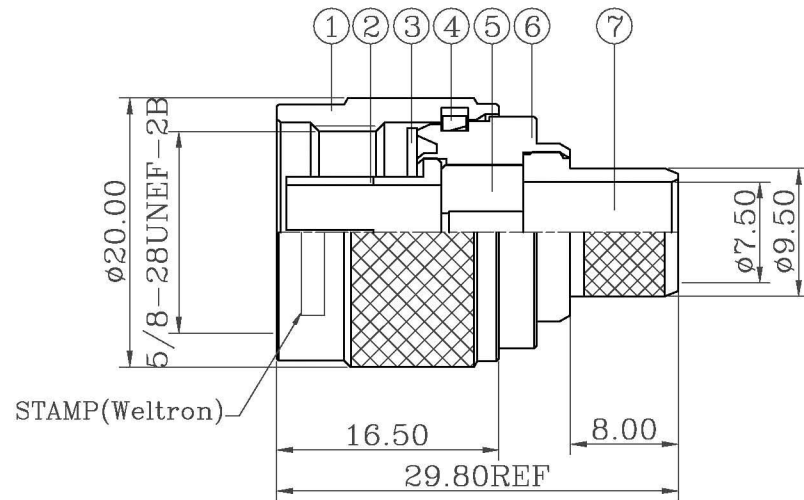

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. SILVER PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"
OR TO SOLDER

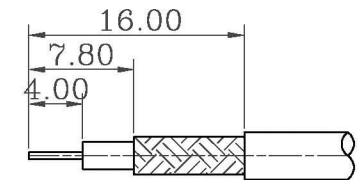

RECOMMENDED
CABLE STRIPPING DIM'S

44-262-214

9	FERRULE	NOTE 5	1	NOTE 2
8	CONTACT PIN	NOTE 1	1	NOTE 3
7	REAR BODY	NOTE 1	1	NOTE 2
6	BODY	NOTE 1	1	NOTE 2
5	INSULATOR	NOTE 4	1	NATURAL
4	RETAINER RING	NOTE 1	1	NATURAL
3	GASKET	RUBBER	1	RED
2	OUT CONTACT	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron®				TITLE N PLUG CRIMP 50 OHM FOR RG9, 214U, BELDEN 8268 CABLE		
PART NO.	44-262-214	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00 ANGLES ±5°	DESIGNED	NQ
		SCALE	FIT		DRAWING	NQ
MODEL NO.					CHECKED	David
		EDITION	A1		APPROVED	Andy
CAD FILE				PUBLISH DATE	2010/01/03	3RD ANGLE