
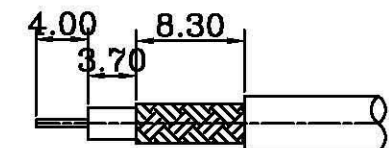
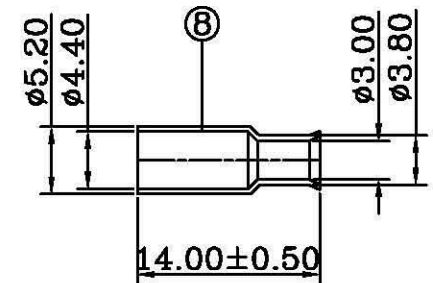

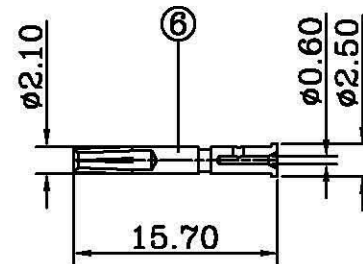


ROHS Compliant

REVISIONS

RevNo	Description	Date	Revision	Mender
1				
2				

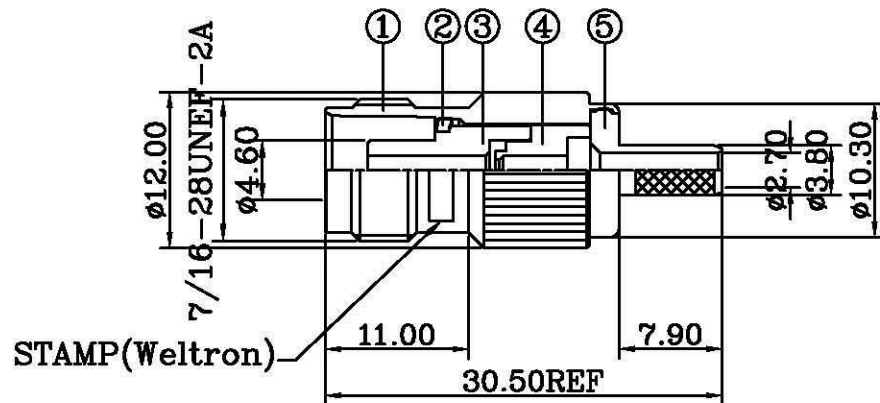

RECOMMENDED
CABLE STRIPPING DIM'S

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.JIS H 3250,C 2700

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .178"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
OR TO SOLDER

8	FERRULE	NOTE 4	1	NOTE 2
7	SLEEVE	POM	1	NATURAL
6	CONTACT PIN	NOTE 1	1	NOTE 3
5	REAR BODY	NOTE 1	1	NOTE 2
4	INSULATOR	TEFLON	1	WHITE
3	INSULATOR	TEFLON	1	WHITE
2	WASHER	IRON	1	NOTE 2
1	BODY	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

Weltron®				TITLE TNC CRIMP JACK 50 OHMS (FOR RG174, 188, 316U CABLE)		
PART NO.	44-273-174	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 ANGLES 15-30 = ±0.30 ±5° 30-120 = ±0.60 >120 = ±1.00	DESIGNED	NQ
		SCALE	FIT		DRAWING	NQ
MODEL NO.			CHECKED		David	
DRAWING NO.			APPROVED		Andy	
			2012/12/15		 3RD ANGLE	