
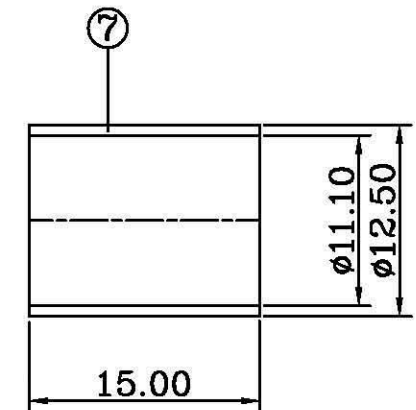
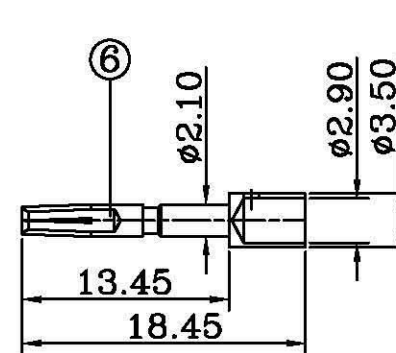


ROHS Compliant

REVISIONS


RevNo	Description	Date	Revision	Mender
1				
2				

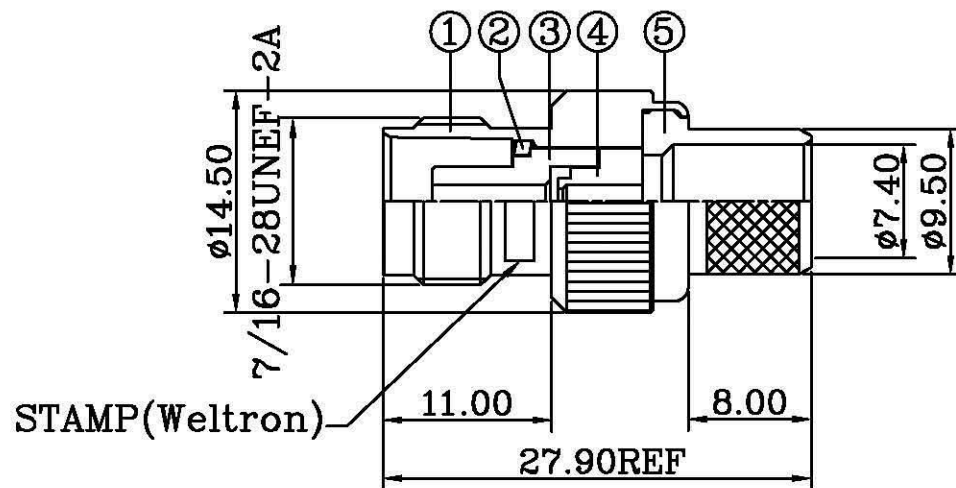

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.JIS H 3250,C 2700

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .429"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .128"
OR TO SOLDER

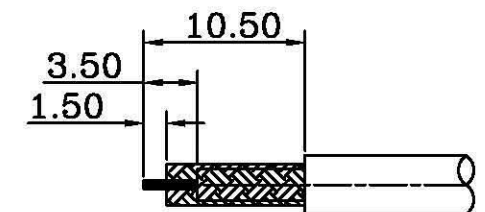

RECOMMENDED
CABLE STRIPPING DIM'S

7	FERRULE	NOTE 4	1	NOTE 2
6	CONTACT PIN	NOTE 1	1	NOTE 3
5	REAR BODY	NOTE 1	1	NOTE 2
4	INSULATOR	TEFLON	1	WHITE
3	INSULATOR	TEFLON	1	WHITE
2	WASHER	IRON	1	NOTE 2
1	BODY	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron ®				TITLE TNC CRIMP JACK 50 OHMS (FOR RG8U, BEL9913, LMR400 CABLE)			
PART NO.	44-273-LMR400	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00	ANGLES ±5°	DESIGNED	NQ
		SCALE	FIT			DRAWING	NQ
MODEL NO.						CHECKED	David
DRAWING NO.		EDITION	A1	PUBLISH DATE		APPROVED	Andy
				2012/12/15		3RD ANGLE	