



ISOMETRIC VIEW

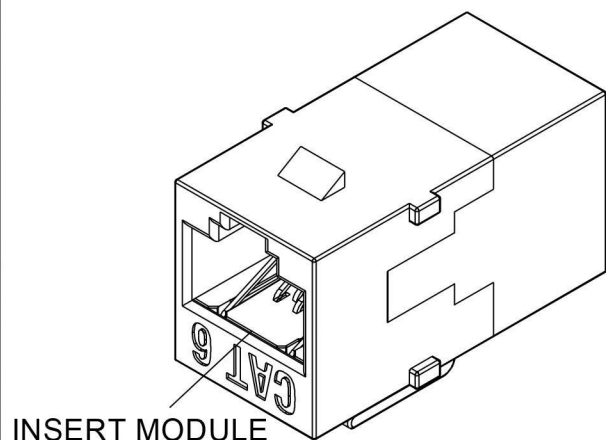


JACK HOUSING LEFT

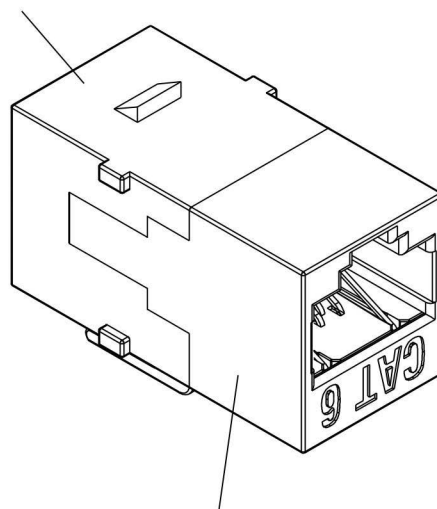

JACK HOUSING RIGHT

ASSEMBLY DIMENSION

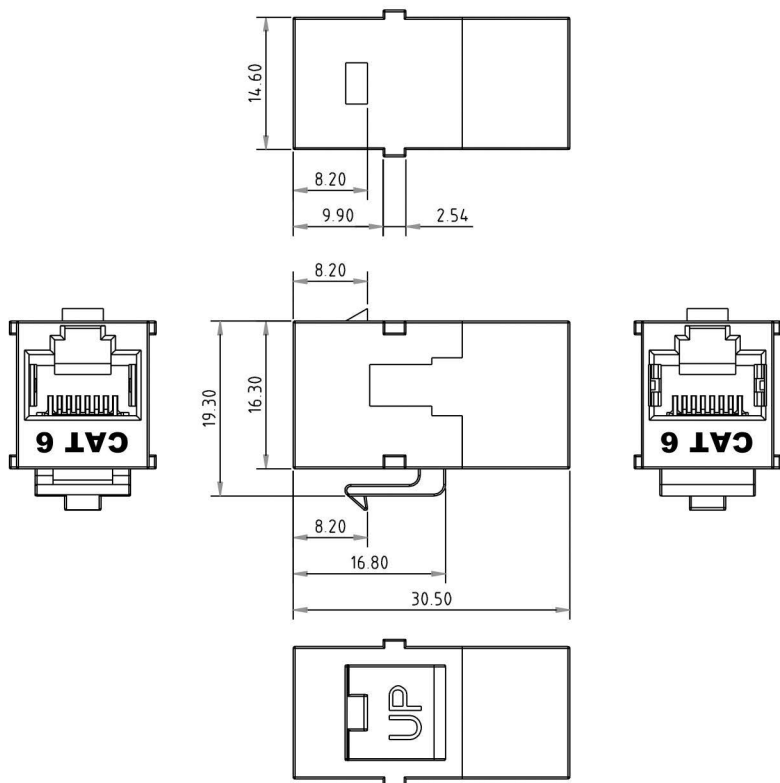

COMPONENTS

ITEM	PART NAME	Q'TY
3	INSERT MODULE	2
2	JACK HOUSING LEFT	1
1	JACK HOUSING RIGHT	1

Transmission Performance:
Meet Cat 6 Channel performance requirements specified in TIA-568-C.2

ELECTRICAL

Electrical Insulation Resistance : 500 M Ω min. @ 100V d.c.

Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute,

MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0

Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold

UNLESS OTHERWISE SPECIFIED: TOLERANCES			PROJECT ID 1026K-M6B		Weltron [®]		
INCH	MM	ANGULAR	FILE	DATE			
.X ± .016	.X ± 0.2	X ± 1°	Z3019.dwg		TITLE CAT 6 KEYSTONE COUPLER		
.XX ± .008	.XX ± 0.1	.X ± .5°					
.XXX ± .004							
MATERIAL	DRAWN	JASON	02/08'10	SIZE A4			
SURFACE	CHECK						
FINISH	APPROVED			DRAWING NUMBER Z3019		PART NUMBER 44-771-8C6-XX	REV B
				SCALE		UNIT mm	SHEET 1 OF 1