



CHANGE			
EDITI	MODIFICATION	UPDATE DATE	SIGNATURE

NOTES:

1. Operation Temperature:-40℃~+85℃.
2. Electrical Characteristics:
 - 2.1>Rated Current:125V AC, 1.5A@25℃.
 - 2.2>Contact Resistance:20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min, 100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
3. Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force:30N Max.
 - 3.2>Durability:750 cycles Min.
4. Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.







Weltron®

PRODUCT NO		44-751-8C6SL		DESCRIPTION		UTP/CAT6		SHEET.	1/1	
MATERIAL		PC	UNIT	mm	SCALE	1:1	DWG NO	MP25018	EDITI	A/0
DIMENSIONAL TOLERANCE			THIRD ANGLE PROJECTION				DRAWN		DATE	2018.04.27
X. X ±0.2							CHECK		DATE	
X. XX ±0.10							APPRO.		DATE	
X. XXX ±0.05										
ANGLE ±2°										

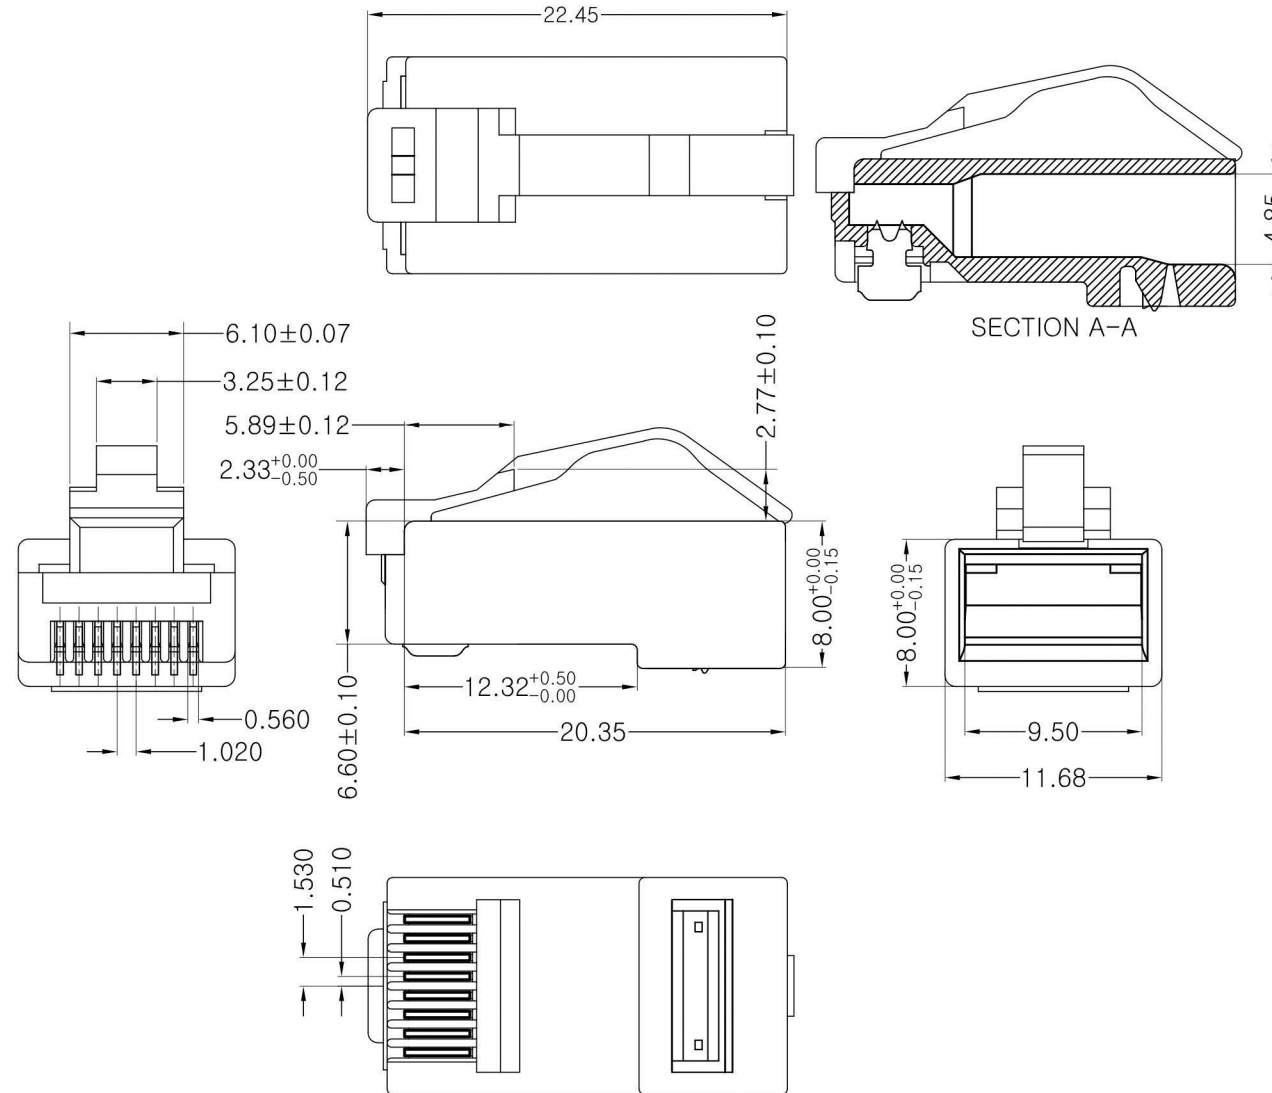

1	Modular Plug	Contacts	8PCS	/	2 ☐ 2Prongs 3 ☐ 3Prongs	G/F" ☐ 1u" ☐ 3u" ☐ 6u" ☐ 15u" ☐ 30u" ☐ 50u" ☐ OTHER ☐	Brass ☐ Phosphor copper ☐
		Housing	1PCS	20*2061**	CAT6/UTP		94V-2 ☐ 94V-0 ☐
NO.	NAME	QTY	PART NO.	DESCRIPTION		MATERIAL	







CHANGE			
EDITI	MODIFICATION	UPDATE DATE	SIGNATURE

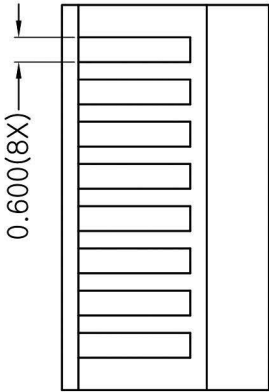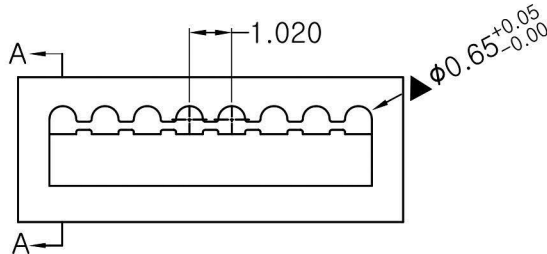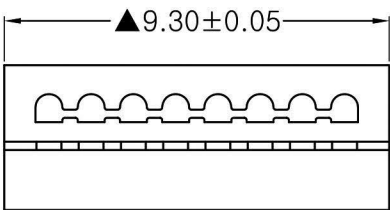



weltron®

PRODUCT NO	44-751-8C6SL		DESCRIPTION		SINGLE ROW SET Ø0.65		SHEET	1/1	
MATERIAL	PC	UNIT	mm	SCALE	NULL	DWG NO	LB01013	EDITI	A/0
DIMENSIONAL TOLERANCE			THIRD ANGLE PROJECTION			DRAWN		DATE	2017.05.02
						CHECK		DATE	
						APPRO.		DATE	

CHANGE			
EDITI	MODIFICATION	UPDATE DATE	SIGNATURE

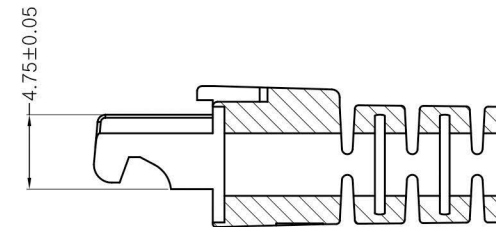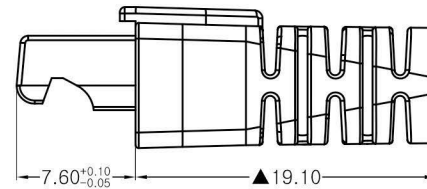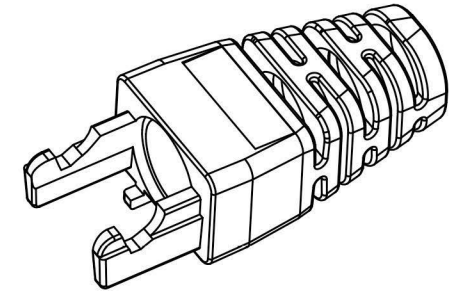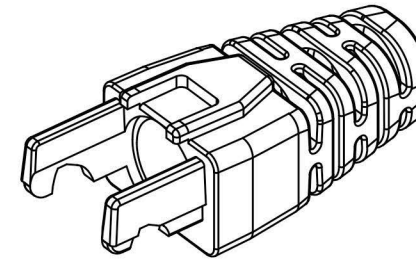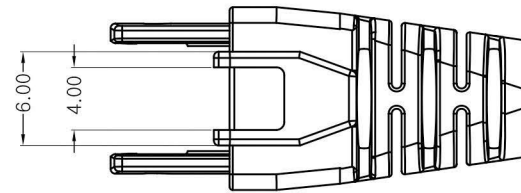

SECTION A-A

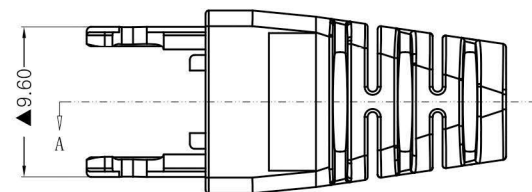

Weltron®

PRODUCT NO		44-751-8C6SL		DESCRIPTION		JACKET /APERTURE 4. 0mm		SHEET	1/1	
MATERIAL		PC	UNIT	mm	SCALE	NULL	DWG NO	SR00027	EDITI	A/0
DIMENSIONAL TOLERANCE			THIRD ANGLE PROJECTION				DRAWN		DATE	2018. 04. 25
X. X			±0. 2				CHECK		DATE	
X. XX			±0. 10						DATE	
X. XXX			±0. 05				APPRO.		DATE	
ANGLE			±2°						DATE	