





NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

| Rev. | Rev. Date | Modified By | Brief Description |
|------|-----------|-------------|-------------------|
|      |           |             |                   |

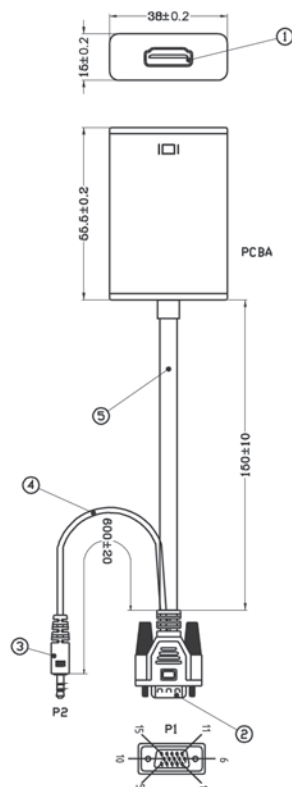

PIN ASSIGNMENT:

| P1             |             | PCBA           |
|----------------|-------------|----------------|
| 1              | RED(COAX)   | 1              |
| 2              | GREEN(COAX) | 2              |
| 3              | BLUE(COAX)  | 3              |
| 9              | RED         | 9              |
| 12             | DARK-BROWN  | 12             |
| 13             | BLACK       | 13             |
| 14             | TRANSPARENT | 14             |
| 15             | BLUE        | 15             |
| P2             |             |                |
| 1              | RED         | RED 1          |
| 2              | BLUE        | GREEN 2        |
| 3              | GOLD        | GOLD 3         |
| 6+7+8+11+SHELL | DRAIN       | 6+7+8+11+SHELL |

Electrical performance test: VGA TO HDMI real machine testing  
 1 Signal Source PC 1080P/60HZ  
 2 Video Imaging signal jitter - free, no trailing, no ghosting, no missing colors etc.  
 3 TV or monitor: 1920\*1080P/60HZ

| NO. | PART NAME                  | SPECIFICATION DESCRIPTION                                                           | QTY | UNIT |
|-----|----------------------------|-------------------------------------------------------------------------------------|-----|------|
| 9   | hdmi baffle                | ABS black                                                                           | 1   | PCS  |
| 8   | Aluminum Case              | Aluminum, black oxide                                                               | 1   | PCS  |
| 7   | cable entry baffle         | ABS black                                                                           | 1   | PCS  |
| 6   | SR                         | black PVD plastic                                                                   | 1   | PCS  |
| 5   | PVD cable                  | VGA CABLE (30#*3COAX+30#*8C)+DRAIN(1/4/0.1BC)+AL OD5.0mm JACKET PVC BLACK           | 1   | PCS  |
| 4   | audio cable                | enameled wire(7/0.08+250D nylon wire)*3C(RED, GREEN, GOLD) OD2.5mm JACKET PVC BLACK | 1   | PCS  |
| 3   | 3.6 Three-dimensional head | nickle-plated                                                                       | 1   | PCS  |
| 2   | vga male                   | nickle-plated steel casing,gold-plated terminal,blue plastic Insulator              | 1   | PCS  |
| 1   | hdmi female                | nickle-plated steel casing,gold-plated terminal,black plastic Insulator             | 1   | PCS  |

**Weltron®**

DRAWN BY KEVIN

DATE:  
2014-02-17

DESCRIPTION:  
VGA TO HDMI

CHECKED BY

SHEET 1 of 1

ITEM NO. 91-734

APPROVED BY JON

SCALE 1:1

REV. 01

UNIT: mm

