


ROHS Compliant

REVISIONS				
RevNo	Description	Date	Revision	Mender
1				
2				

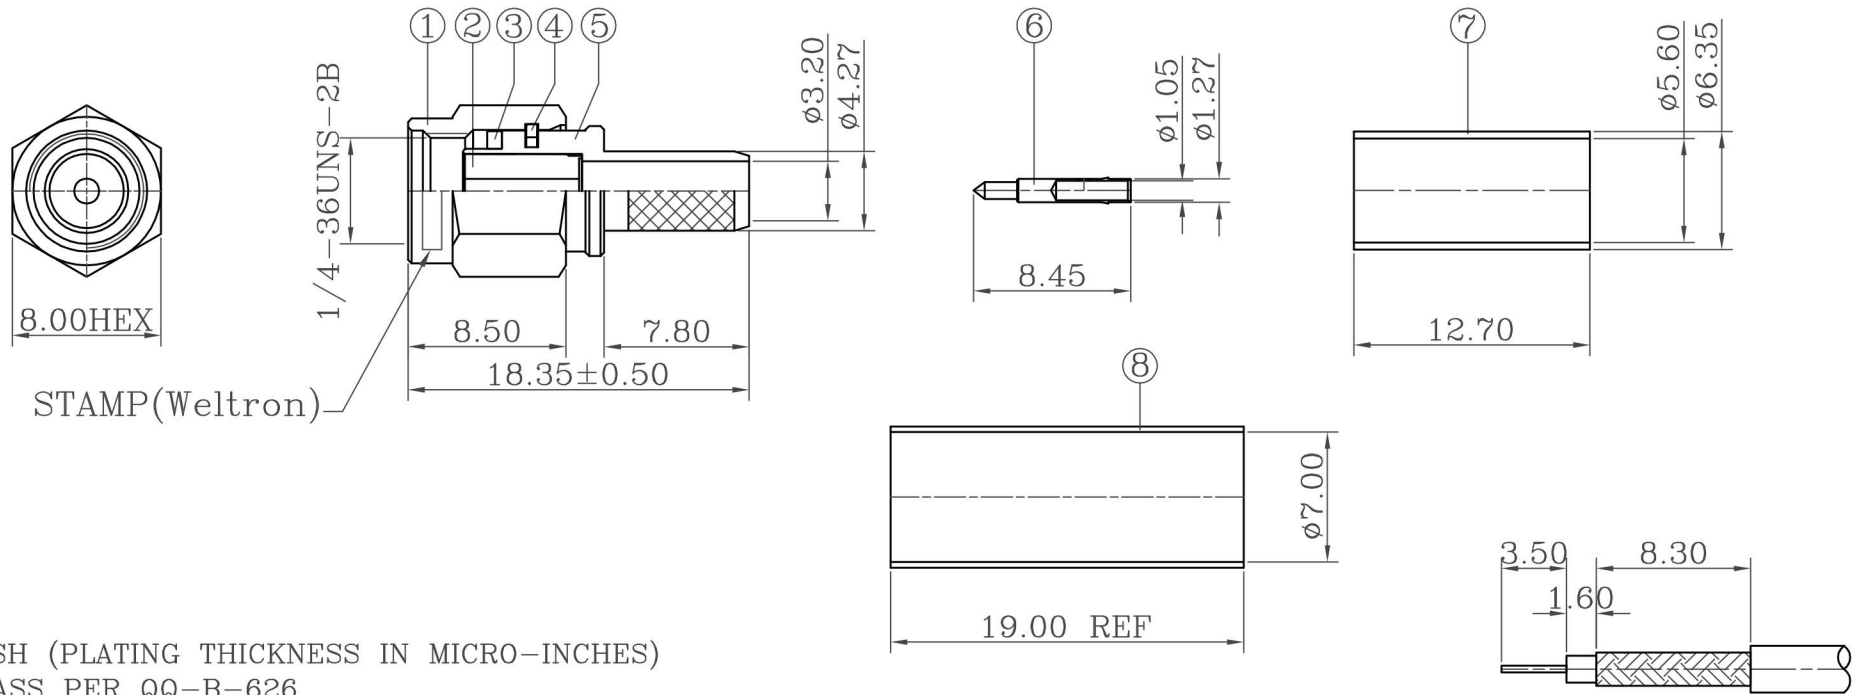

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)
1.BRASS PER QQ-B-626
2.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN.
THICK OVER COPPER STRIKE
3.JIS H 3250,C 2700

1.CRIMPED FERRULE
HEX CRIMP SIZE .213"
2.CONTACT PIN TO SOLDER

RECOMMENDED
CABLE STRIPPING DIM'S

8	HEAT SHRINK TUBE		1	BLACK
7	FERRULE	NOTE 3	1	NOTE 2
6	CONTACT PIN	NOTE 1	1	NOTE 2
5	BODY	NOTE 1	1	NOTE 2
4	RETAINER RING	Be.copper	1	NATURAL
3	GASKET	SILICON	1	RED
2	INSULATOR	TEFLON	1	NATURAL
1	NUT	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron®				TITLE SMA PLUG CRIMP, 50 OHM FOR RG55, 142, 223 CABLE		
PART NO.	44-900-223	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 ANGLES 15-30 = ±0.30 ±5° 30-120 = ±0.60 >120 = ±1.00	DESIGNED	<i>Xwj</i>
		SCALE	FIT		DRAWING	<i>Ckq</i>
MODEL NO.			CHECKED		<i>David</i>	
DRAWING NO.		EDITION	A1		APPROVED	<i>Andy</i>
CAD FILE					2010/01/03	 3RD ANGLE